



LOW PROFILE RIGHT ANGLE SANDERS

Designed for Tight Access

SAS10AXL15



FEATURES & BENEFITS:

COMPACT ANGLE HEADS –


- 1.90" to 2.10" overall height

1/4"-20 INTERNAL THREAD SPINDLE –

- Screw accessory into spindle
- 1.1" shorter than collets

VARIETY OF OPTIONS –

- 0.3, 0.5 or 1.0-hp
- 12,000 to 23,000 rpm
- Extended

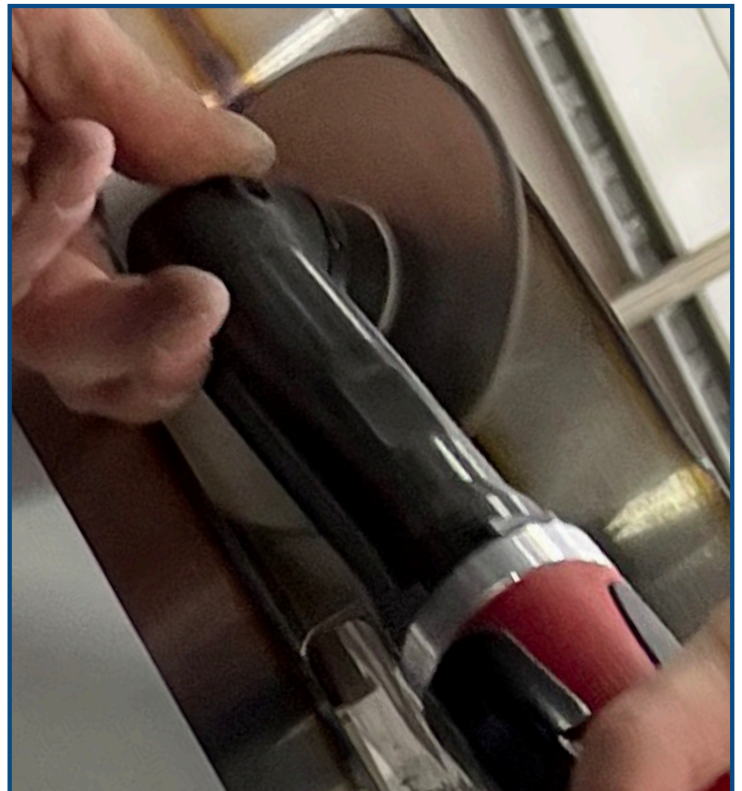

LOW PROFILE RIGHT ANGLE SANDERS



Right Angle Disc Sander – 1/4"-20 Internal Thread




Model Number	Free Speed	Weight		Length		Air Consumption		Head Height
	rpm	lb	kg	in	mm	scfm	l/s	
0.3 hp (0.22 kW)								
SAS03S122-20	12000	1.1	0.5	5.6	143	11	5.2	2.1
SAS03S202-20	20000	1.1	0.5	5.6	143	11	5.2	2.1
0.3 hp (0.22 kW) - EXTENDED								
SAS03X122-20	12000	2.0	0.9	9.5	240	11	5.2	2.1
SAS03X202-20	20000	2.0	0.9	9.5	240	11	5.2	2.1
0.5 hp (0.37 kW)								
SAS05S122-20	12000	1.6	0.73	6.9	175	23	11	1.9
SAS05S152-20	15000	1.6	0.73	6.9	175	23	11	1.9
SAS05S182-20	18000	1.6	0.73	6.9	175	23	11	1.9
SAS05S232-20	23000	1.5	0.59	6.4	143	23	11	2.1
1 hp (0.75 kW)								
SAS10A122-20	12000	2.15	0.98	7.5	190	30	14	2.1
SAS10A152-20	15000	2.15	0.98	7.5	190	30	14	2.1
SAS10A182-20	18000	2.15	0.98	7.5	190	30	14	2.1
1 hp (0.75 kW) - EXTENDED								
SAS10AXL15	15000	3.2	1.50	11.3	285	30	14	1.9



General: Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

Standard Equipment: Parts List • Safety and Instruction Manual • Support Handle (1 hp Models) • Spindle Wrenches • 1/4"-20 Threaded Arbor • Backing Pad & Nut

Accessories: Sander Accessories, see pages 69 – 70

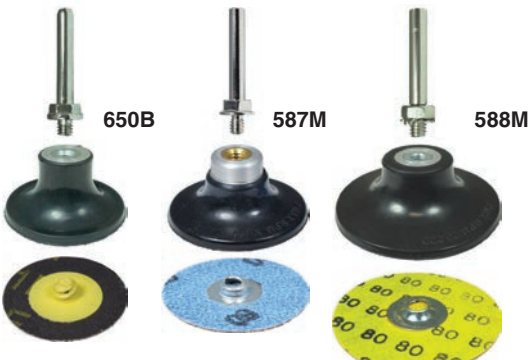

*Sanding Disc Not Included

Speed-Lok Backing Pads

- 1/4" Shank
- 1/4"-20 Thread

Part Number	Type	Diameter		Max. rpm
		in	mm	
650B	R (plastic)	2	50	30000
587M	S (metal)	2	50	30000
588M	S (metal)	3	75	20000

siouxtools.com



250 Snap-on Drive
P.O. Box 1596
Murphy, North Carolina USA 28906
PH: 828.835.9765
FAX: 828.835.9685
TOLL FREE: 866.259.7291
TOLL FREE FAX: 800.722.7236

Belgium
Tel.: 32 (0)14 23 19 67
Fax: 32 (0)14 23 26 27
Email: Industrial.be@snapon.com

Netherlands
Tel.: 31 (0)88 0104000
Fax: 31 (0)88 0104010
Email: Industrial.nl@snapon.com

Latin America
Tel.: 786-254-7765
Fax: 786-534-9350
e-mail: latinamerica.caribbean@snapon.com

Germany
Tel.: 49 2104 9509-0
Fax: 49 2104 9509-99
e-mail: indus.germany@snapon.com

Italy
Tel.: 00 39 02 66 04 53 70
Fax: 00 39 02 61 29 78 15
e-mail: indus.italia@snapon.com

United Kingdom
Tel.: 44 (0) 1536-413904
Fax: 44 (0) 1536-413874
e-mail: industrialuk@snapon.com

Asia
Tel.: 65-6451-5570
Fax: 65-6451-5574
e-mail: esales.sg@snapon.com

Australia
Tel.: 61 2 9837 9100
Fax: 61 2 9624 2578
e-mail: SOTA.customerservice@snapon.com